

JOINTS / GARNITURES MECANICQUES / RACCORDS TOURNANTS / TRESSSES / JOINTS / GARNITURES MECANICQ  
/ FLACHDICHTUNGEN / GLEITRINGDICHTUNGEN / DREHDURCHFÜHRUNG / PACKUNGEN / FLACHDICHTUNG  
KINGS / JOINTINGS / MECHANICAL SEALS / ROTARY UNIONS / PACKINGS / JOINTINGS / MECHANICAL SEALS  
QUETADURAS / CIERRES MECANICOS / JUNTAS ROTATIVAS / EMPAQUETADURAS / JUNTAS / CIERR

**STATIC SEALING**



# LATTY<sup>®</sup>carb 96




**MULTI-PURPOSE ARAMID/CARBON GASKET  
FOR ALL INDUSTRIES**



[www.latty.com](http://www.latty.com)



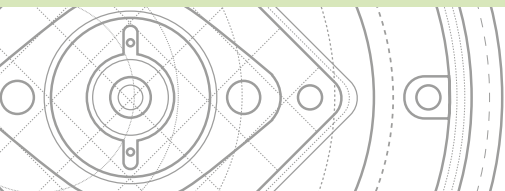

# LATTY<sup>®</sup> carb 96

STATIC SEALING

## Multi-purpose aramid/carbon gasket for all industries

### Characteristics

- ▶ Gasket material made of selected carbon and mineral fibres bonded with a mix of synthetic elastomers, compressed to obtain sheet material
- ▶ Anti-adhesive treatment on both faces.

### Advantages

- ▶ Improved resistance of the gasket at high temperatures resulting from the presence of elastomer reinforced by carbon fibres
- ▶ The carbon and the addition of graphite on both faces facilitate assembly/disassembly operations and reduce flange adhesion
- ▶ High-pressure applications

### Approvals

- ▶ BAM (oxygen)
- ▶ WRAS (drinking water)
- ▶ KTW (drinking water)
- ▶ TUV (VDI 2440)

### Parameters (not associated)

- ▶ Pressure: < 130 bar
- ▶ Temperature: < 450°C
- ▶ pH: 0-14

### Equipments

- ▶ Fitting on utility networks
- ▶ Flanges
- ▶ Casings

### Industries

- ▶ Chemical
- ▶ Petrochemical
- ▶ Energy

### Fluids

- ▶ Water, steam
- ▶ Hydrocarbide

### Dimensions\*

- ▶ Sheet dimensions: 1500 mm x 1500 mm
- ▶ Thicknesses available: 0,5 mm, 1 mm, 1,5 mm, 2 mm or 3 mm
- ▶ On request, available as cut gaskets

*\*Other dimensions and thicknesses on request*



The information given in this document is for guidance only and does not commit LATTY international S.A. in any way. LATTY international does not warrant the performance of its products, unless properly fitted and used in accordance with the instructions, nor can it accept any claim for consequential liability. LATTY International S.A. is only liable for the quality of its products as it does not involve itself in their fitting or use, which must be done in accordance with the instructions.



**Plant**  
1, rue Xavier Latty  
28160 BROU, FRANCE  
Tél. : +33 (0) 2 37 44 77 77  
Fax : +33 (0) 2 37 44 77 99  
customerservice@latty.com



[www.latty.com](http://www.latty.com)