

LATTY[®]flon 1779

high-quality ramie yarns
with a PTFE mix
and an inert lubricant

CLEAN FLUIDS OR SLURRIES,
except corrosive ones

Parameters (non associated)

Temperature	- 40°C to + 120°C
Pressure	40 MPa
Speed	15 m/s
pH	4 - 11



LATTY[®]flon 1779

fields of application

There is a need for sealing against high speeds, dangerous and aggressive fluids and high temperatures; but there are also numerous even though less spectacular applications which are just as important from the standpoint of the economics of servicing and maintenance.

LATTYflon 1779 is designed for these widespread, less onerous, applications.

To provide leaktightness against commonly used, chemically non-aggressive fluids, whether clean or polluted, mostly at ambient or at temperatures up to 60 to 80°C, for example:

water, seawater, oils, hydrocarbons, solvents, paper pulp, emulsified water, etc.

On rotary and reciprocating pumps, hydraulic presses, marine sterntube seals, etc.

description

LATTYflon 1779 is made from a very high grade ramie yarn which is fine, silky, strong and rot-proof. Before plaiting, each yarn is impregnated under pressure with our exclusive "Filcoat" process, with a mixture of PTFE and inert lubricant. It is impregnated a second time during plaiting.

LATTYflon 1779

- Can be used to advantage in place of cotton, flax and hemp-based packings and other synthetic yarns packing at temperatures below 100°C.
- Offer an excellent quality of service/price ratio for this type of seal.
- Provides the maintenance engineer with a useful economic balance between service and initial cost.

power absorbed in the gland

LATTYflon 1779 sets up minimum stress in the gland. This is due to the method of plaiting and to the treatment of the yarn.

Practical value:
start-up without special precautions, leakage easier to control, no over-heating.

some properties in use


LATTYflon 1779 is a non-asbestos plaited packing, which is clean to handle and both flexible and compact.

It is easy to fit and meets heavy duty service needs (pressure up to 40 MPa) without transmitting any severe stress to shafts or pistons (see graph below).

The generous, lubricating impregnation, right through the yarn is not washed out by the fluid, so that LATTYflon 1779 retains all its resilience, low friction and non-abrasive properties (leaktightness, protection of shafts) throughout its long service life.

principal characteristics

Working temperature	- 40°C to + 120°C
Fluid pressure	up to 40 MPa
Speed	15 m/s
Chemical resistance	pH 4-11
P.V factor	500
Compressibility at 10 MPa	30%
Elastic recovery at 10 MPa	40%
Friction coefficient	0.1

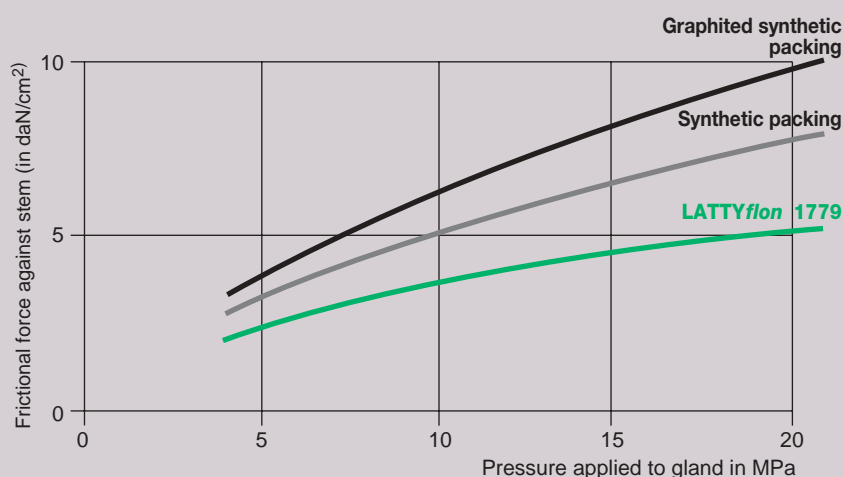

The information given in this document is for guidance only and does not commit LATTY international in any way. LATTY international does not warrant the performance of its products, unless properly fitted and used in accordance with the instructions, nor can accept any claim for consequential liability.



LATTY[®] international s.a.

Your source for all sealing solutions

PLANT & OFFICES:

1, rue Xavier-Latty - 28160 Brou - France

Phone: +33 (0)2 37 44 77 77 - Fax: +33 (0)2 37 44 77 99

e-mail: customerservice@latty.com - www.latty.com

©LATTY, registered trademark LATTY international s.a.