





BRAIDED PACKINGS & RINGS

# LATTYflon 3207

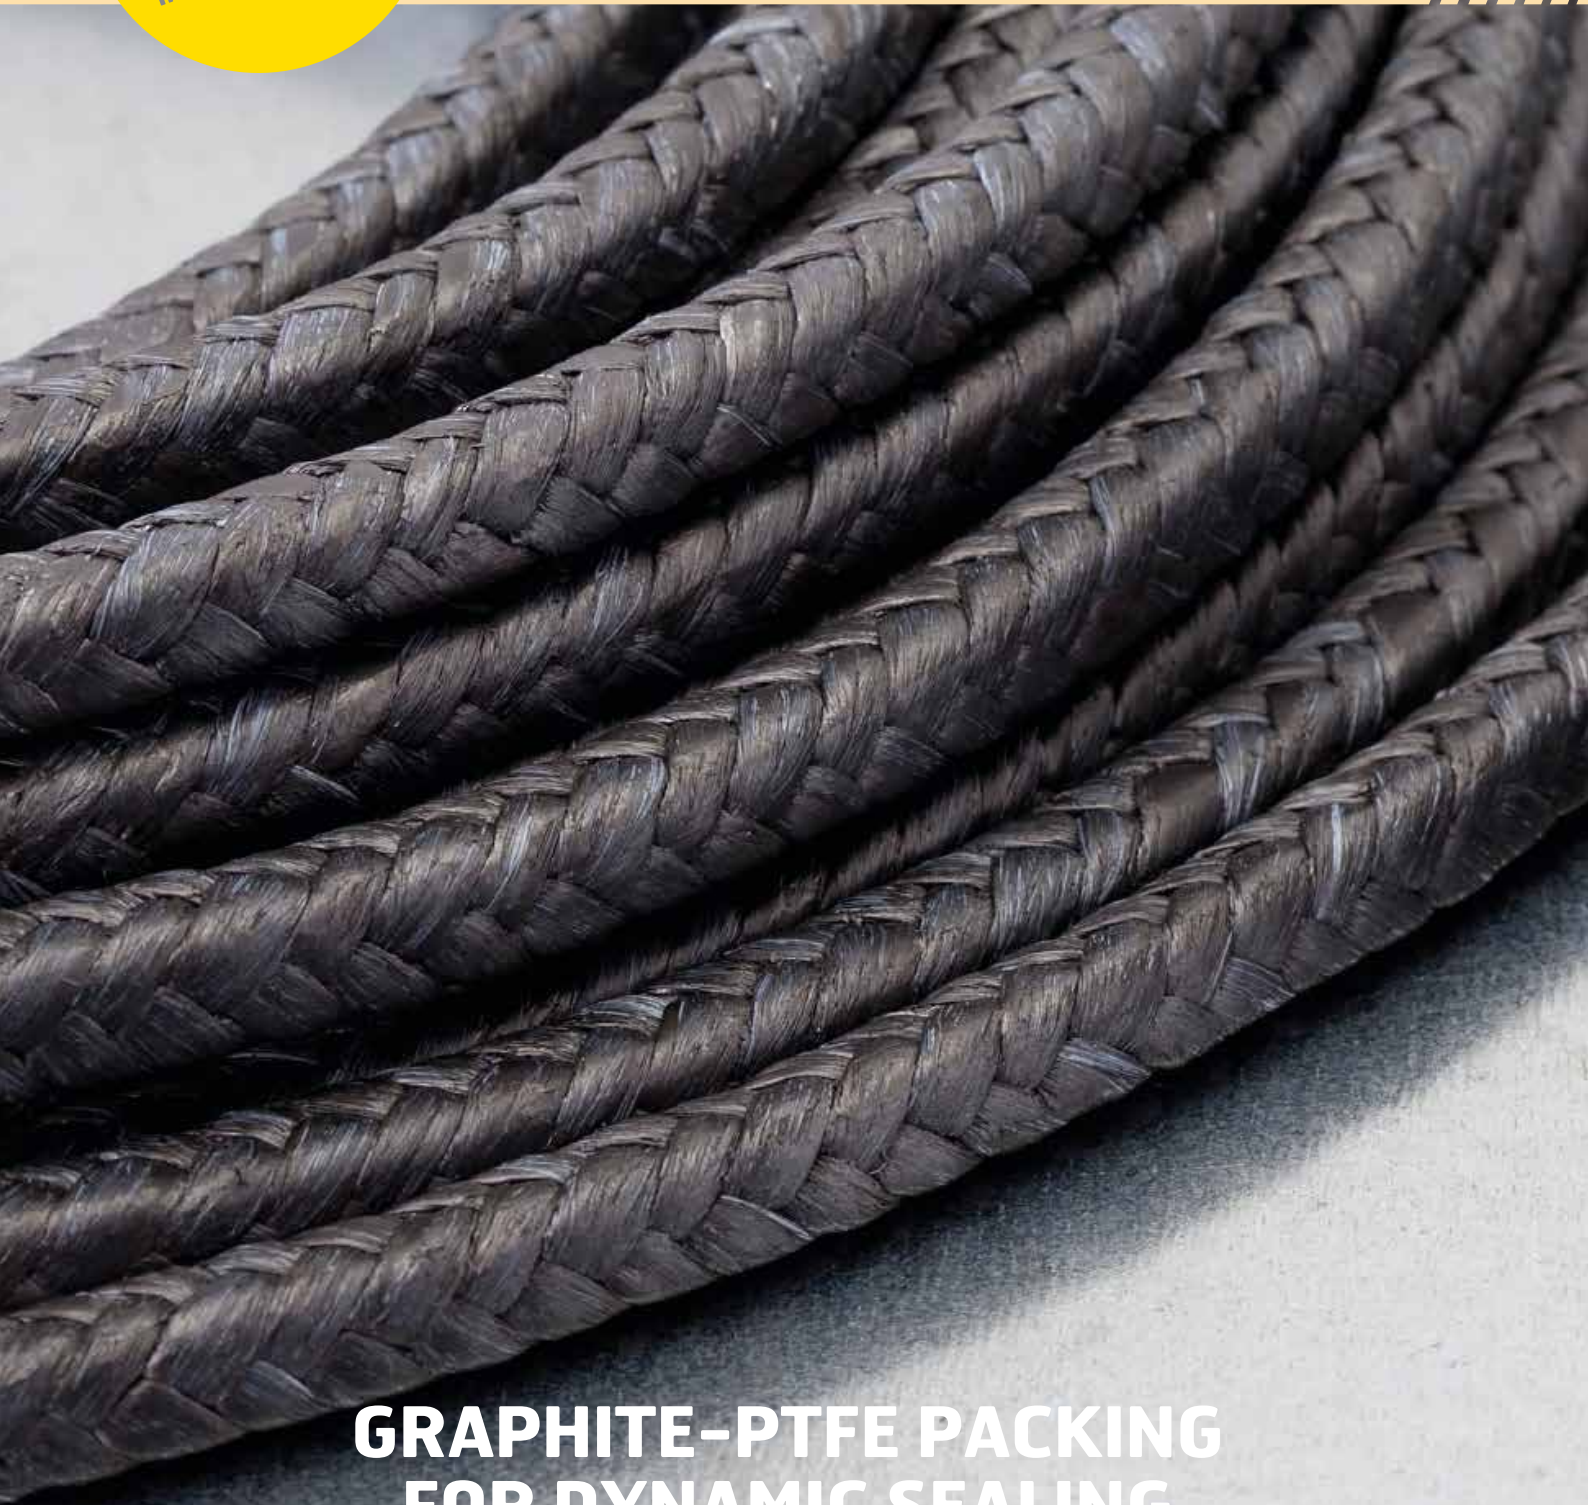

**GRAPHITE-PTFE PACKING  
FOR DYNAMIC SEALING  
WITH CHEMICALLY AGGRESSIVE FLUIDS**

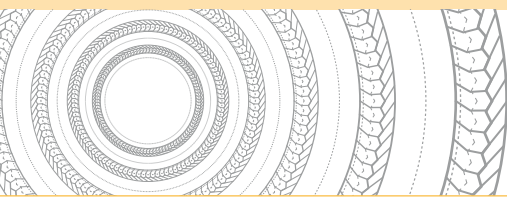

# LATTYflon 3207

BRAIDED PACKINGS & RINGS

## Graphite-PTFE packing for dynamic sealing

### Characteristics

- ▶ Packing made of 100 % PTFE silk yarns, pre-treated with continuous graphite impregnation to the core, then re-impregnated with a silicon lubricant.

### Advantages

- ▶ Chemical inertness
- ▶ Low friction coefficient
- ▶ Withstands high speed
- ▶ High resistance to chemical aggressions

### Fluids

- ▶ Any type of fluid, except abrasive fluids

### Parameters (not associated)

- ▶ Temperature: -200°C to + 250°C
- ▶ Pressure: 0 to 80 bar
- ▶ Speed: < 20 m/s
- ▶ pH: 0 - 14

### Industries

- ▶ All types of industries

### Equipements

- ▶ Rotary units
- ▶ Rotary pumps

### Dimensions

- ▶ Available in square sections from 6 to 25.4 mm.



The information given in this document is for guidance only and does not commit LATTY international in any way. LATTY international does not warrant the performance of its products, unless properly fitted and used in accordance with the instructions, nor can it accept any claim for consequential liability.. LATTY International S.A. is only liable for the quality of its products as it does not involve itself in their fitting or use, which must be done in accordance with the instructions.



**Plant**  
1, rue Xavier Latty  
F-28160 BROU, FRANCE  
Tél. +33 (0) 2 37 44 77 77  
Fax +33 (0) 2 37 44 77 99  
customerservice@latty.com



[www.latty.com](http://www.latty.com)