



BRAIDED PACKINGS & RINGS

LATTYflon 4789




Aramid packing, good mechanical performance in all industries.



www.latty.com



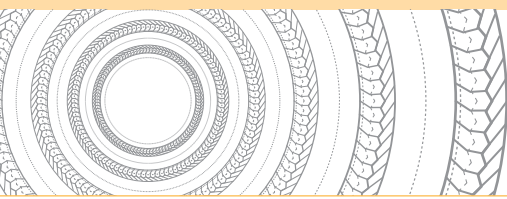

LATTYflon 4789

BRAIDED PACKINGS & RINGS

Aramid packing, good mechanical performance in all industries. Ideal for abrasive fluids.

Characteristics

- ▶ Packing made of aramid/staple rayon compound yarns, each single yarn being impregnated with PTFE using our exclusive «Filcoat» -process, then re-impregnated with a mix of PTFE and inert food-quality lubricant during braiding operation.
- ▶ Available in preformed packing rings, on request.

Advantages

- ▶ Good resistance to the abrasive fluids
- ▶ Slight tightening
- ▶ Packing longevity
- ▶ Lubricated friction
- ▶ Easy cutting
- ▶ Good rings resistance
- ▶ Silicone-free packing

Industries

- ▶ Food industry
- ▶ Petrochemical
- ▶ Pharmaceutical
- ▶ Chemical
- ▶ Sugar
- ▶ Pulp and paper mills
- ▶ Power stations
- ▶ Marine

Materials

- ▶ Pumps
- ▶ Rotary movements

Parameters (not associated)

- ▶ Temperature: -200°C to +275°C
- ▶ Pressure: 0 to 100 bar
- ▶ Speed: < 20 m/s
- ▶ pH: 2 - 12

Approvals

- ▶ PMUC 17-045
- ▶ WRC/WRAS (drinking potable)

Dimensions

- ▶ In square section of 3 to 32 mm.



The information given in this document is for guidance only and does not commit LATTY international in any way. LATTY international does not warrant the performance of its products, unless properly fitted and used in accordance with the instructions, nor can it accept any claim for consequential liability.. LATTY International S.A. is only liable for the quality of its products as it does not involve itself in their fitting or use, which must be done in accordance with the instructions.



Plant
 1, rue Xavier Latty
 F-28160 BROU, FRANCE
 Tél. +33 (0) 2 37 44 77 77
 Fax +33 (0) 2 37 44 77 99
 customerservice@latty.com



www.latty.com