


STATIC SEALING




LATTY®flon 84L

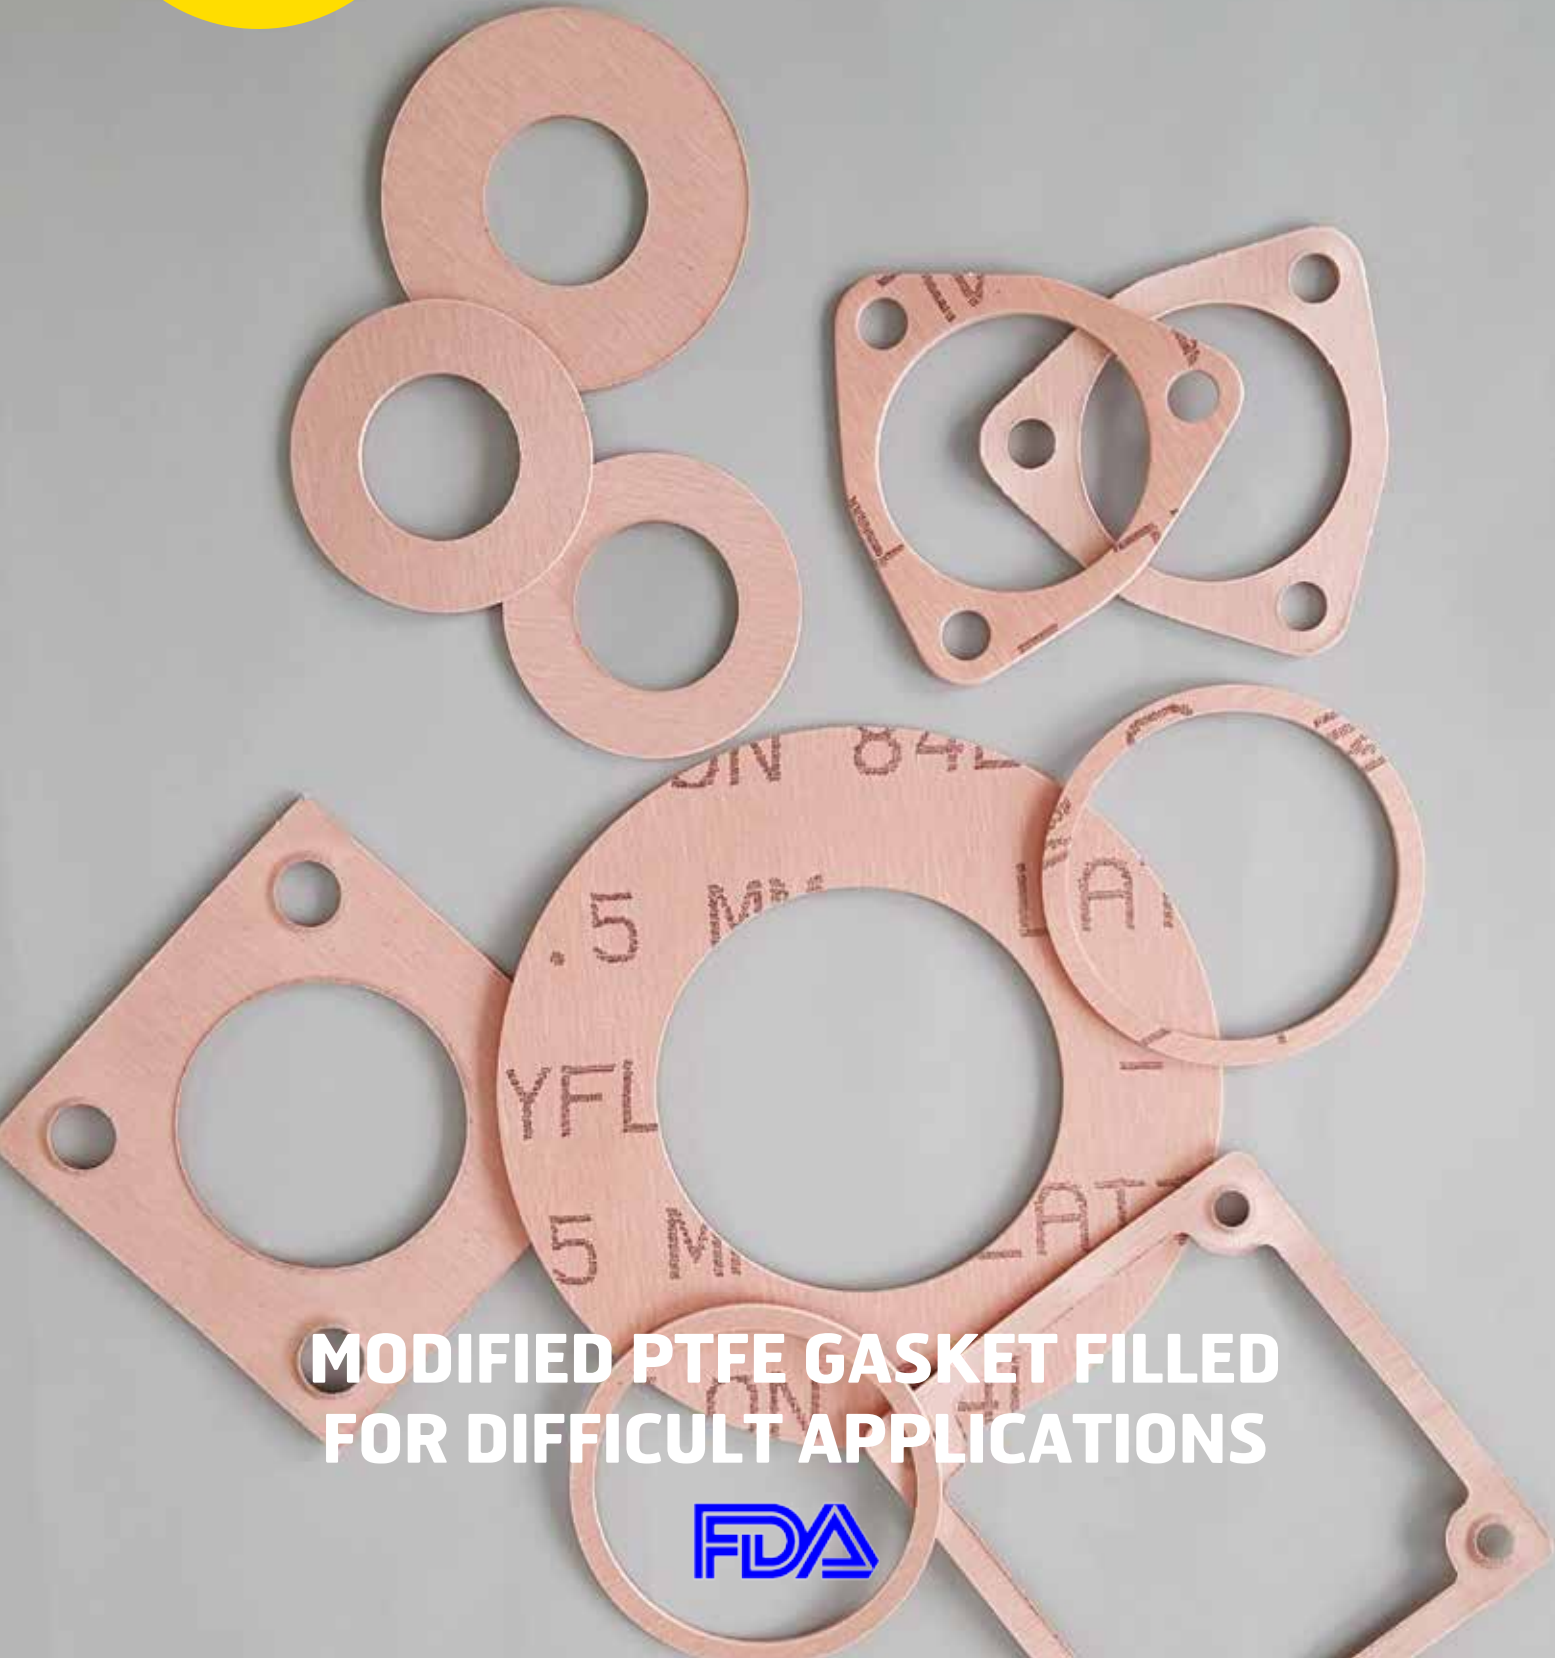

**MODIFIED PTFE GASKET FILLED
FOR DIFFICULT APPLICATIONS**



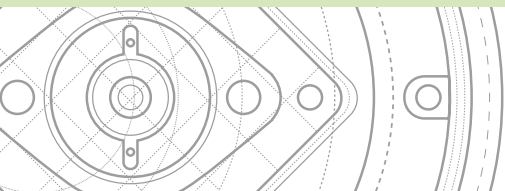

LATTY[®]flon 84 L

STATIC SEALING

Modified PTFE gasket filled for difficult applications

Characteristics

- ▶ Flexible PTFE-based gasket material
- ▶ Excellent chemical resistance when used with different media: acids, solvents, hydrocarbons, chlorine, water and steam
- ▶ Ideal for difficult applications

Advantages

- ▶ Total chemical inertness
- ▶ Authorised for use in the food industry
- ▶ High compressibility
- ▶ Good creep resistance
- ▶ Does not alter with time
- ▶ Water repellent
- ▶ Non-flammable
- ▶ Easier maintenance, does not adhere to flanges

Industries

- ▶ Chemical
- ▶ Petrochemical
- ▶ Pharmaceutical
- ▶ Cosmetic
- ▶ Food-processing
- ▶ Energy

Equipments

- ▶ Distillation columns
- ▶ Heat exchangers
- ▶ Piping
- ▶ Flange connections
- ▶ Valves
- ▶ Pumps
- ▶ Centrifuges

Approval

- ▶ FDA

General Operating Parameters

- ▶ Pressure: < 85 bar
- ▶ Temperature: -200 °C to +260°C
- ▶ pH: 0 - 14

Dimensions

- ▶ Sheet dimensions: 1500 mm x 1500 mm
- ▶ Available thicknesses*: 1,5 mm, 2 mm or 3 mm

**Other thicknesses on request*



The information given in this document is for guidance only and does not commit LATTY international S.A. in any way. LATTY international does not warrant the performance of its products, unless properly fitted and used in accordance with the instructions, nor can it accept any claim for consequential liability. LATTY International S.A. is only liable for the quality of its products as it does not involve itself in their fitting or use, which must be done in accordance with the instructions.



Plant
 1, rue Xavier Latty
 28160 BROU, FRANCE
 Tél. : +33 (0) 2 37 44 77 77
 Fax : +33 (0) 2 37 44 77 99
 customerservice@latty.com



www.latty.com