

JOINTS / GARNITURES MECANICAS / RACCORDS TOURNANTS / TRESSSES / JOINTS / GARNITURES MECANICAS /
/ FLACHDICHTUNGEN / GLEITRINGDICHTUNGEN / DREHDURCHFÜHRUNG / PACKUNGEN / FLACHDICHTUNGEN
/ JOINTINGS / MECHANICAL SEALS / ROTARY UNIONS / PACKINGS / JOINTINGS / MECHANICAL SEALS
/ EMPAQUETADURAS / CIERRES MECANICOS / JUNTAS ROTATIVAS / EMPAQUETADURAS / JUNTAS / CIERR

STATIC SEALING




LATTY[®]gold 32 R



**GASKET FOR GENERAL USE
IN ANY KIND OF INDUSTRY**

www.latty.com



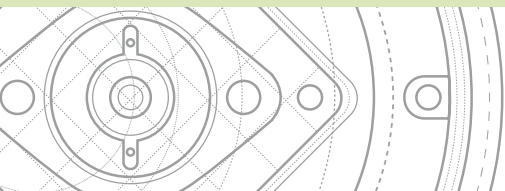

LATTY[®] gold 32 R

STATIC SEALING

Gasket for general use in any kind of industry

Characteristics

- ▶ Gasket material based on synthetic fibres and NBR elastomer fibres
- ▶ Non-stick coating

Advantages

- ▶ Very good resistance to various mechanical, thermal and chemical loads
- ▶ Suitable for any type of applications
- ▶ Flexible gasket material, easy to cut

Industries

- ▶ Water utilities
- ▶ Shipbuilding
- ▶ Any type of industries, fitting on usual media

General Operating Parameters

- ▶ Pressure: < 40 bar
- ▶ Temperature: -50 °C to +180°C
steam: < 120°C

Fluids

- ▶ Water
- ▶ Oil
- ▶ Air
- ▶ Fuel oil
- ▶ Gas

Equipments

- ▶ Fitting on utility networks
- ▶ Flanges
- ▶ Casings

Dimensions

- ▶ Sheet dimensions*: 1500 mm x 1500 mm, or 4500 mm x 1500 mm
- ▶ Available thicknesses*: 1,5 mm, 2 mm, 3 mm or 4 mm

** Other thicknesses and dimensions on request*



The information given in this document is for guidance only and does not commit LATTY international S.A. in any way. LATTY international does not warrant the performance of its products, unless properly fitted and used in accordance with the instructions, nor can it accept any claim for consequential liability. LATTY International S.A. is only liable for the quality of its products as it does not involve itself in their fitting or use, which must be done in accordance with the instructions.



Plant
1, rue Xavier Latty
28160 BROU, FRANCE
Tél. : +33 (0) 2 37 44 77 77
Fax : +33 (0) 2 37 44 77 99
customerservice@latty.com



www.latty.com