





BRAIDED PACKINGS & RINGS

LATTYgraf 6118

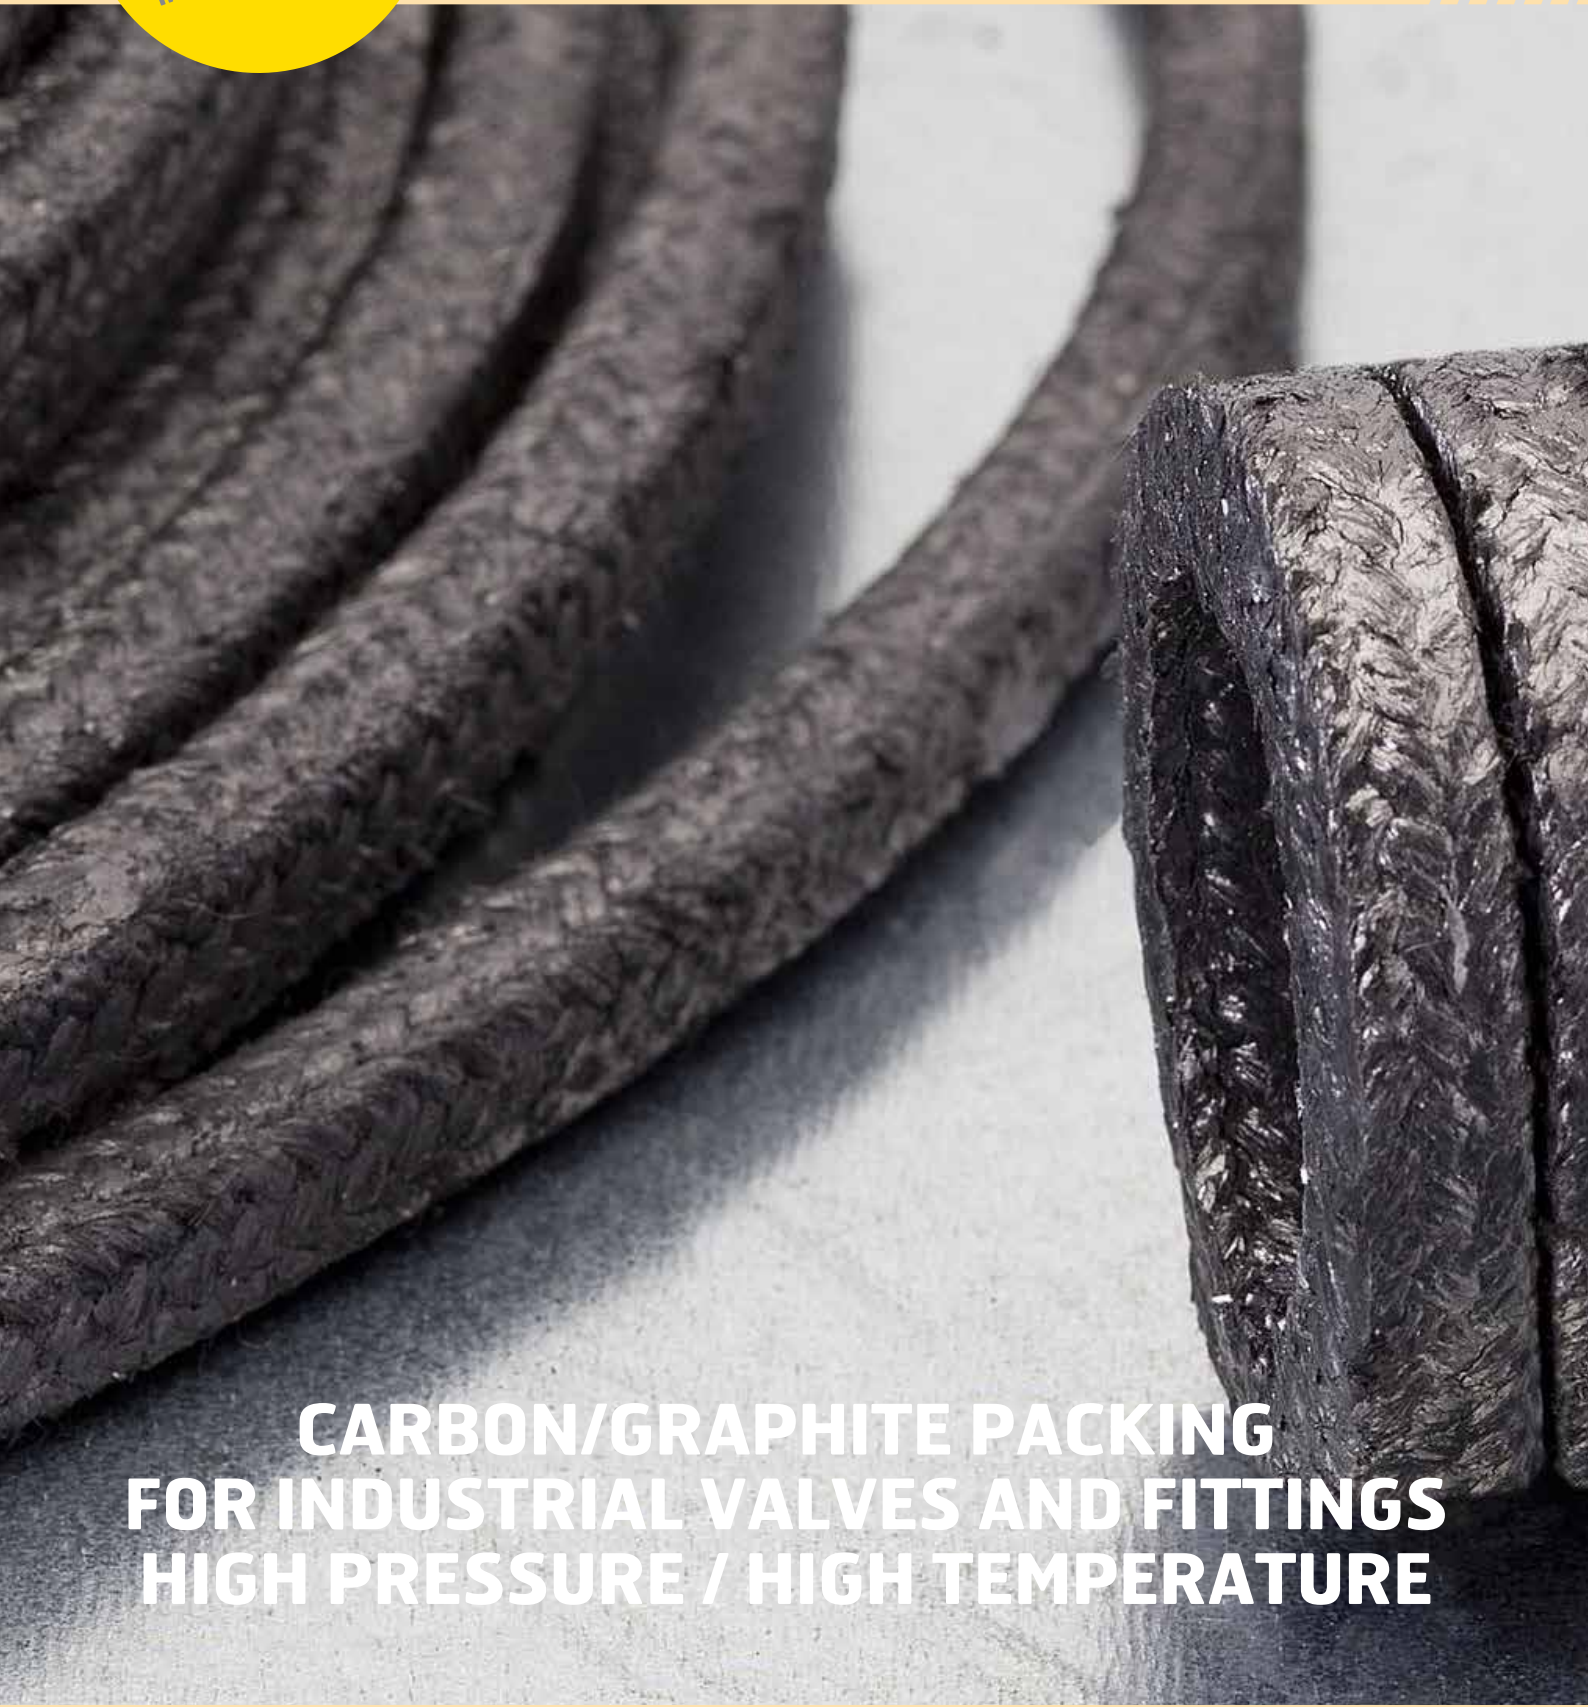

**CARBON/GRAPHITE PACKING
FOR INDUSTRIAL VALVES AND FITTINGS
HIGH PRESSURE / HIGH TEMPERATURE**

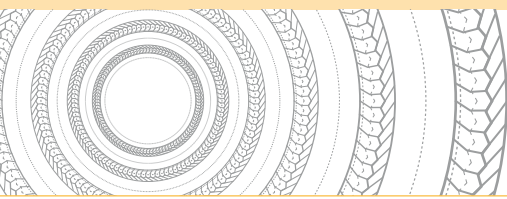

LATTYgraf 6118

BRAIDED PACKINGS & RINGS

Carbon/graphite packing for industrial valves and fittings

Characteristics

- ▶ Packing made of an exclusive LATTY yarn - high-strength carbon fibres and Inconel wires intimately mixed - and expanded graphite yarns, then impregnated and coated with a graphite-based mix.
- ▶ Contains a corrosion inhibitor

Advantages

- ▶ Very good resistance to thermal stresses under load
- ▶ Very high stability and low relaxation
- ▶ Applications for valves and fittings > 250°C
- ▶ Easy and clean cuts
- ▶ Suitable for use as bottom and top rings (anti-extrusion) together with expanded graphite rings (LATTYgraf E, E2) or for motor valves in association with LATTYflon 3260 LM

Equipments

- ▶ High-performance valves and fittings

Industries

- ▶ Refineries
- ▶ Energy production
- ▶ Boilers

Fluids

- ▶ All types of fluids
- ▶ Medium and high-pressure steam

Parameters (not associated)

- ▶ Temperature: - 200°C to + 600°C
- ▶ Pressure: 0 to 300 bar
- ▶ Speed: < 1 m/s
- ▶ pH : 0 - 14

Dimensions

- ▶ Available in square sections from 3 to 19 mm
- ▶ On request, available as preformed rings



The information given in this document is for guidance only and does not commit LATTY international in any way. LATTY international does not warrant the performance of its products, unless properly fitted and used in accordance with the instructions, nor can it accept any claim for consequential liability.. LATTY International S.A. is only liable for the quality of its products as it does not involve itself in their fitting or use, which must be done in accordance with the instructions.

Réf. : 32481 (02/2018) - LATTY BROU



Plant
1, rue Xavier Latty
F-28160 BROU, FRANCE
Tél. +33 (0) 2 37 44 77 77
Fax +33 (0) 2 37 44 77 99
customerservice@latty.com



www.latty.com