




BRAIDED PACKINGS & RINGS

# LATTYgraf T



**CARBON/GRAPHITE PACKING  
FOR ROTARY UNIT APPLICATIONS  
IDEAL FOR HIGH SPEED**

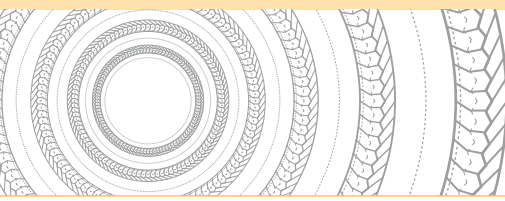

# LATTYgraf T

BRAIDED PACKINGS & RINGS

**Carbon/graphite packing for rotary unit applications.  
Ideal for high speed.**

## Caractéristiques

- ▶ Packing made of 100% pure graphite continuous yarns, impregnated with graphite.
- ▶ Limitation: precautions for use in oxidising environments

## Advantages

- ▶ High heat dissipation efficiency
- ▶ Low friction coefficient
- ▶ Outstanding elastic recovery
- ▶ High resistance to thermal shocks
- ▶ High ability to absorb mechanical deformations (out-of-round anomalies, vibrations, etc.)
- ▶ Easier installation due to its high flexibility
- ▶ No more retightening operations

## Industries

- ▶ All types of industries

## Fluids

- ▶ Slurries or clean fluids

## Equipments

- ▶ High-pressure and temperature rotary units
- ▶ Rotary pumps
- ▶ Stuffing boxes

## Parameters (not associated)

- ▶ Temperature: -200°C to +600°C
- ▶ Pressure: 0 to 300 bar
- ▶ Speed: < 35 m/s
- ▶ pH: 0 - 14

## Dimensions

- ▶ Available in square sections from 6 to 20 mm
- ▶ On request, available as preformed rings



Les indications portées sur cette documentation ne le sont qu'à titre indicatif et ne sauraient engager la responsabilité de LATTY international. En effet, nous ne garantissons pas les performances de nos produits en cas de montage défectueux ou en cas d'utilisation non conforme aux indications portées. LATTY international ne répond que de la qualité de ses produits, n'intervenant ni dans le montage, ni dans la mise en œuvre qui doivent être faits dans les règles de l'art.



**Site de production**  
1, rue Xavier Latty  
F-28160 BROU, FRANCE  
Tél. +33 (0) 2 37 44 77 77  
Fax +33 (0) 2 37 44 77 99  
customerservice@latty.com



[www.latty.com](http://www.latty.com)