




BRAIDED PACKINGS & RINGS

# LATTYgraf TSP



**CARBON PACKING  
FOR DYNAMIC SEALING**

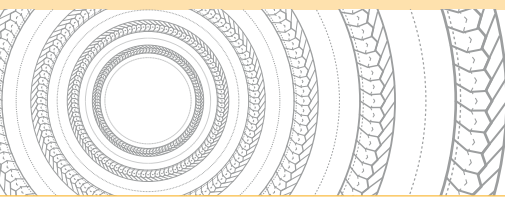

# LATTYgraf TSP

BRAIDED PACKINGS & RINGS

## Carbon packing for dynamic sealing

### Characteristics

- ▶ Packing made of carbon continuous yarns, impregnated with a graphite mix
- ▶ Limitation: precautions for use in oxidising environments

### Advantages

- ▶ Outstanding elastic recovery
- ▶ Low friction coefficient
- ▶ Withstand high speed and temperatures
- ▶ High resistance to chemical aggressions
- ▶ High thermal conductivity properties

### Industries

- ▶ Chemicals
- ▶ Petrochemicals
- ▶ Nuclear
- ▶ Paper industry

### Fluids

- ▶ Slurries, aggressive or clean fluids, water, demineralised water, salt water, steam, hydrocarbons, solvents, all chemical fluids except oleum, fuming nitric acid, aqua regia and fluorine

### Equipments

- ▶ Rotary units
- ▶ Mixers
- ▶ Agitators
- ▶ Rotary
- ▶ Control valves
- ▶ On/off valves

### Parameters (not associated)

- ▶ Temperature: -200°C to + 550°C
- ▶ Pressure: 0 to 300 bar
- ▶ Speed: < 35 m/s
- ▶ pH: 0 - 14

### Dimensions

- ▶ Available in square sections from 6 to 16 mm.



The information given in this document is for guidance only and does not commit LATTY international in any way. LATTY international does not warrant the performance of its products, unless properly fitted and used in accordance with the instructions, nor can it accept any claim for consequential liability.. LATTY International S.A. is only liable for the quality of its products as it does not involve itself in their fitting or use, which must be done in accordance with the instructions.

Réf. : 21215 (02/2018) - LATTY BROU



**Plant**  
1, rue Xavier Latty  
F-28160 BROU, FRANCE  
Tél. +33 (0) 2 37 44 77 77  
Fax +33 (0) 2 37 44 77 99  
customerservice@latty.com



[www.latty.com](http://www.latty.com)