





BRAIDED PACKINGS & RINGS

LATTYflon 5790

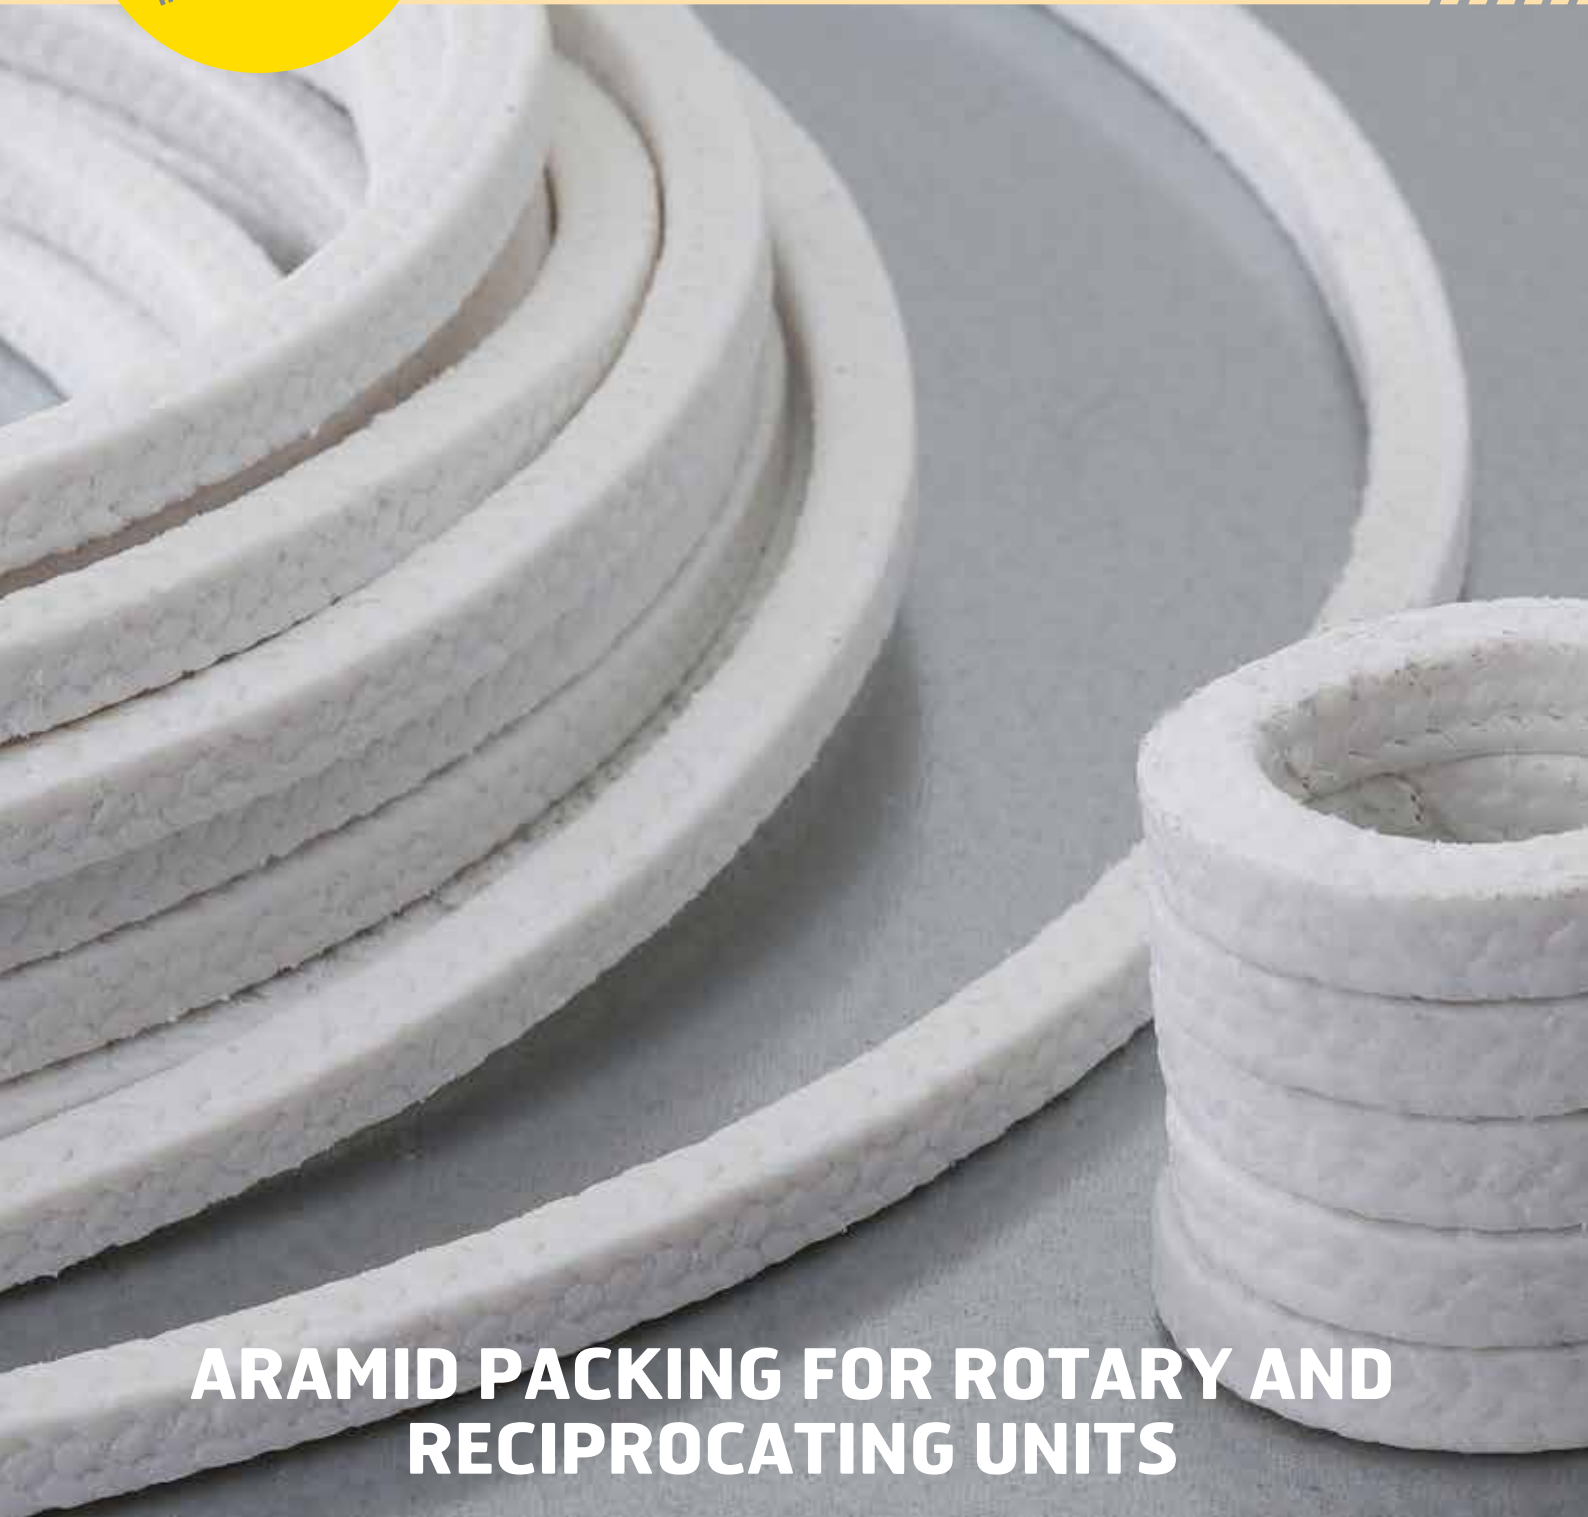

**ARAMID PACKING FOR ROTARY AND
RECIPROCATING UNITS**



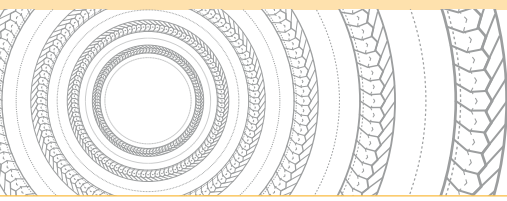

LATTYflon 5790

BRAIDED PACKINGS & RINGS

**Aramid packing for rotary and reciprocating units
Ideal for food environment.**

Characteristics

- ▶ Packing made of mechanical high-strength synthetic yarns and fibres, whilst being less abrasive. The yarns are impregnated with silicone-free lubricant to the core prior to braiding using our patented «FILCOAT» process. This lubricant provides outstanding gliding sliding properties and improves the resistance to abrasion.

Advantages

- ▶ Outstanding resistance to wear in rotation.
- ▶ Low friction coefficient
- ▶ Gentle on sleeve or shaft as a result of the synthetic yarns of the packing
- ▶ Silicone-free lubricant

Equipments

- ▶ Rotary units
- ▶ Stuffing box
- ▶ Stirrers
- ▶ Mixers
- ▶ Rotary
- ▶ Agitators
- ▶ Refiners

Fluids

- ▶ Slurries or abrasive fluids

Parameters (not associated)

- ▶ Temperature: - 50°C to + 260°C
- ▶ Pressure: 0 to 100 bar
- ▶ Speed: < 20 m/s
- ▶ pH: 2 - 13

Industries

- ▶ Sugar
- ▶ Food processing
- ▶ Water treatment
- ▶ Paper

Approval

- ▶ CE 1935 / 2004

Dimensions

- ▶ Available in square sections from 6 to 25.4 mm
- ▶ On request, available as preformed rings



The information given in this document is for guidance only and does not commit LATTY international in any way. LATTY international does not warrant the performance of its products, unless properly fitted and used in accordance with the instructions, nor can it accept any claim for consequential liability.. LATTY International S.A. is only liable for the quality of its products as it does not involve itself in their fitting or use, which must be done in accordance with the instructions.



Plant
 1, rue Xavier Latty
 F-28160 BROU, FRANCE
 Tél. +33 (0) 2 37 44 77 77
 Fax +33 (0) 2 37 44 77 99
 customerservice@latty.com



www.latty.com

Ref. : 84067 (02/2018) - LATTY BROU